

ITECH ELECTRONIC

IT-EC7800 Series

Programmable AC/DC Power Supply



New Energy



Power Electronics



Home Appliances



Medical Equipment



Scientific Research
&
Education



Your contact:



Schulz-Electronic GmbH
Dr.-Rudolf-Eberle-Straße 2
D-76534 Baden-Baden
Fon + 49.7223.9636.0
vertrieb@schulz-electronic.de
www.schulz-electronic.de





IT-EC7800 Series Programmable AC/DC Power Supply


The IT-EC7800 Series is a programmable AC/DC power supply that integrates advanced Silicon Carbide (SiC) technology and a high power density design, delivering up to 6kVA in a 2U chassis and up to 15kVA in a 3U chassis, combining compact size with powerful performance.

This series includes a built-in high-precision power meter and arbitrary waveform generator, supporting harmonic simulation, complex waveform output, and comprehensive data analysis functions, along with an intuitive LCD touchscreen for easy operation. It is widely used in R&D validation, production testing, and quality control across industries such as new energy, power electronics, and scientific research institutions.

FEATURE

- Adopts Silicon Carbide (SiC) technology
- High power density design: up to 15kVA in 3U, up to 6kVA in 2U
- Voltage rating: 350V L-N
- Harmonic simulation and analysis up to the 50th order
- Output frequency: 16–1000Hz; adjustable voltage and frequency slew rate
- Built-in single-phase or three-phase AC power meter
- Supports four output modes: AC, DC, AC+DC, DC+AC
- Selectable single-phase or three-phase output modes
- Programmable output impedance
- Touchscreen interface with a clean UI design
- Arbitrary waveform simulation, supports CSV waveform import
- Built-in rich waveform database
- List mode simulates power grid restoration and momentary power interruption
- Configurable output start/stop phase angle from 0–360°
- Built-in Surge & Sag simulation
- Built-in Relay Ctrl output for DUT and source electrical isolation
- Built-in USB/CAN/LAN/Digital I/O; optional GPIB/Analog/RS232 interfaces
- Supports CANopen, Modbus, LXI, SCPI, and other communication protocols

Application Fields



New Energy

Onboard chargers, AC/DC charging piles



Home Appliances

Air conditioners, microwave ovens, refrigerators, washing machines



Medical Equipment

CT scanners, MRI systems, life science analyzers, etc.



Power Electronics

Inverters, UPS systems, AC motors



Civil Aviation

Avionics, airport ground support equipment




Research, Universities, Laboratories, Testing Organizations

AC-DC power adapter testing, EMC compliance testing

Model	Output voltage Vac		Output Amps/Phs		Output power	Phase	Height
	V L-N	V L-L	Arms(1Φ)	Arms(3Φ)	Pac		
IT-EC7802-350-10U	350V	606V	10A	—	2kVA	1Φ	2U
IT-EC7804-350-20U	350V	606V	20A	—	4kVA	1Φ	2U
IT-EC7806-350-30	350V	606V	30A	10A	6kVA	1Φ or 3Φ	2U
IT-EC7806-350-90	350V	606V	90A	30A	6kVA	1Φ or 3Φ	3U
IT-EC7809-350-90	350V	606V	90A	30A	9kVA	1Φ or 3Φ	3U
IT-EC7812-350-90	350V	606V	90A	30A	12kVA	1Φ or 3Φ	3U
IT-EC7815-350-90	350V	606V	90A	30A	15kVA	1Φ or 3Φ	3U

*Specifications subject to change without notice

ITECH High Power AC Power Supply Selection Guide

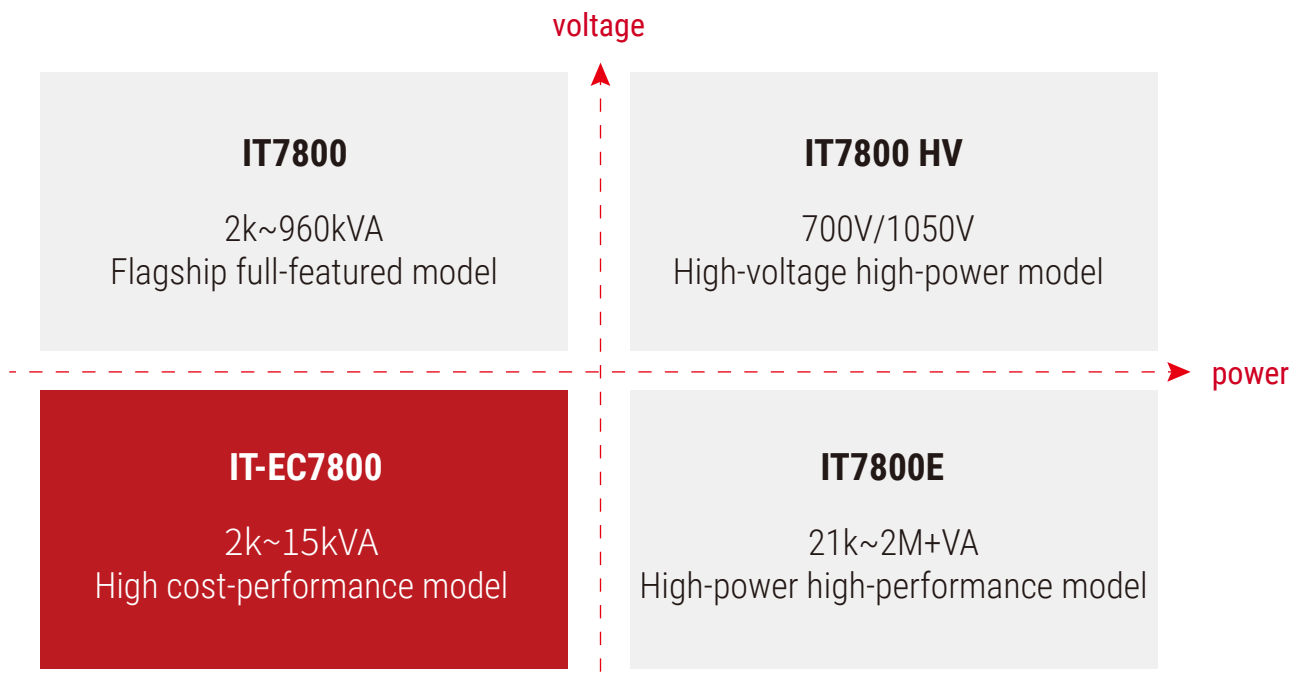

User-Friendly Touchscreen Design

The IT-EC7800 series features a brand-new touchscreen design. Its simple and intuitive UI, combined with a keypad and rotary knob, allows users to make selections directly and quickly. Users can choose different display styles, customize parameter types and their screen positions. The user-friendly settings accommodate a wide range of measurement needs during testing.



The screen can display real-time voltage and current waveforms, with up to 6 oscilloscope traces. Users can perform instant analysis and save data without the need for an external oscilloscope.




Application: testing inductive, capacitive or resistive products

- When testing inductive, capacitive or resistive products, there are certain leading or lagging characteristics of voltage and current.
- Using IT-EC7800 series can not only display real-time data, but also select the desired waveform on the screen for visual observation. And through shortcut keys, save the picture to the storage disk of the peripheral device. It is convenient to perform secondary analysis on data and waveforms, making it easier and more effective to use.

Application: UPS test


- Test standard: YD-T 1095-2018
- Test equipment: IT-EC7800 series high-power programmable AC/DC power supply, IT8600 series AC and DC electronic load
- Test content: Adjust the AC input voltage and change it within the range specified by the standard to see if the UPS meets the indicators related to the input voltage change.

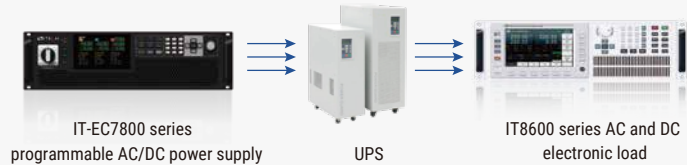

High Power Density Design

The IT-EC7800 series adopts a compact standalone architecture, offering both 2U and 3U configurations to cover a power range from 2kVA to 15kVA, flexibly accommodating a wide variety of test requirements from low to high power. Particularly for the 3U/15kVA model, its volume is reduced to approximately 1/12 of conventional AC power supplies, significantly reducing space requirements. Users can achieve high power density test setups without the need for additional power racks or laboratory expansion, which helps enterprises reduce the cost of building and operating test environments, while improving space utilization and overall testing efficiency.

Traditional power supply 15kVA

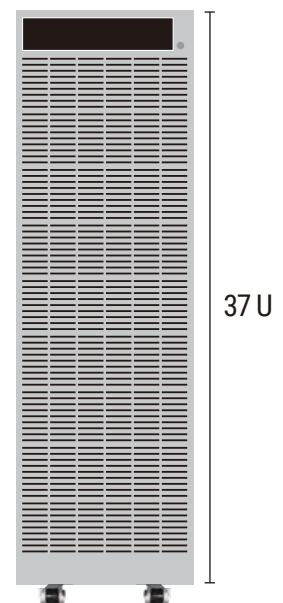

3U
15kVA

2U
6kVA

ATE
set up

bench
test



Surge & Sag Function

The IT-EC7800 series provides surge and sag simulation functions, allowing users to superimpose surges or sags on a sine wave to simulate abnormal voltage fluctuations in electrical systems, to verify the performance of the device under test (DUT) under such conditions.




List Mode

The IT-EC7800 series provides a simple and efficient way to achieve step-by-step or continuous changes in output parameters through LIST, SWEEP, and SURGE & SAG modes. Output parameters such as voltage amplitude, frequency, phase, and waveform can be triggered via internal or external signals of the instrument, enabling simulation of power phenomena such as momentary outages, surges, and ramp-up conditions.

No.	ACrms V	Freq Hz	Time S	More
1	50.000 / 85.000 / 85.000	50.000	0.2	---
2	60.000 / 80.000 / 85.000	60.000	1	---
3	60.000 / 60.000 / 85.000	100.00	0.5	---
4	80.000 / 80.000 / 85.000	50.00	0.1	---


Application- Mains reproduction simulation

· Users can use the panel or program control of IT-EC7800 series to edit and simulate various power interference conditions

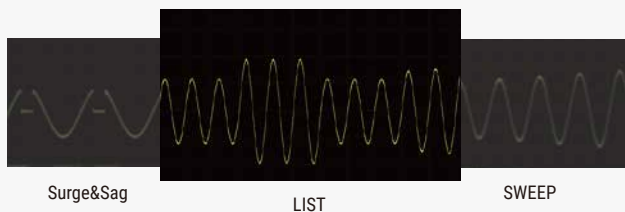


Application- Momentary power interruption simulation

· IT-EC7800 series can also effectively simulate various power interruption situations

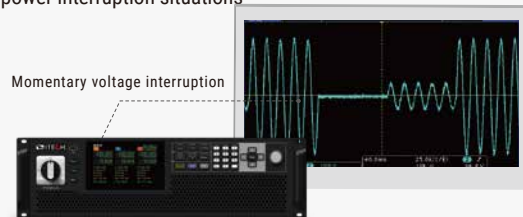

Programmable Output Impedance

The IT-EC7800 series provides programmable output impedance functionality, allowing users to set R and L parameters, to simulate the line impedance of power systems, in compliance with IEC61000-3-3 and IEC61000-3-2 standards.

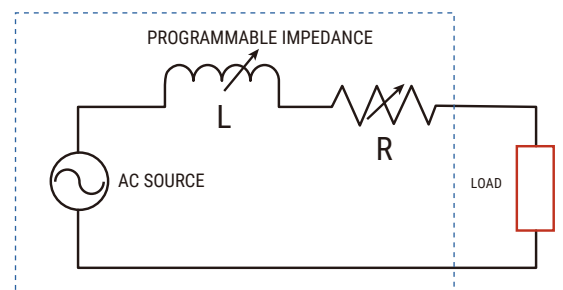


Harmonic Analysis and Simulation Function


The harmonic analysis function of the IT-EC7800 series includes voltage and current harmonic measurements. In harmonic mode, it supports measurement of voltage/current Total Harmonic Distortion (THD) and phase deviation of harmonics relative to the fundamental wave. It also allows multi-order harmonic measurements with results displayed as lists, bar charts, or vector diagrams, making the analysis of test results more intuitive.



histogram

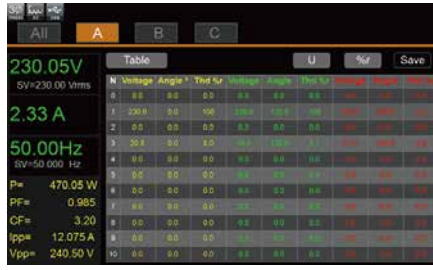

list

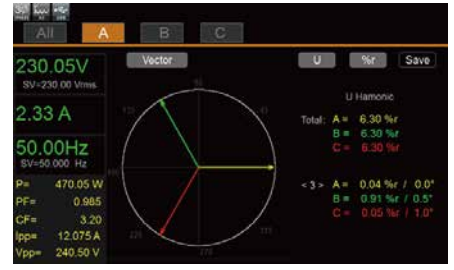

vector diagram


The IT-EC7800 series supports harmonic simulation (single-phase / three-phase / unbalanced three-phase) of up to the 50th voltage harmonic.

50th harmonic simulation




Supports AC, DC, AC+DC, and DC+AC Output Modes


The IT-EC7800 series supports four output modes: AC, DC, AC+DC, and DC+AC, offering both pure AC and DC outputs, and enabling AC output with DC offset or DC output with ripple by using AC+DC or DC+AC modes, thus providing engineers with a broader range of testing applications.

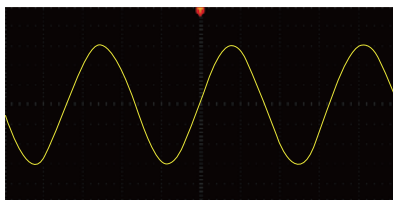


AC

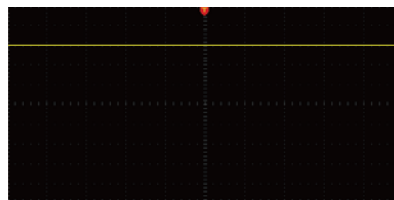


DC

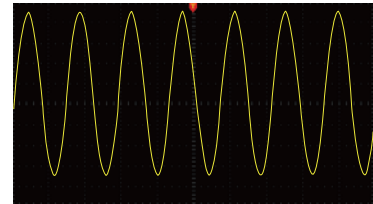


AC+DC
Vac=45V, dc bias=10V

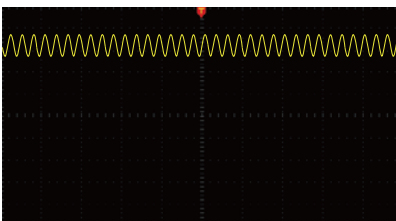

DC+AC
Vdc=50V, sine ripple Vac=5V, frequency 1000Hz

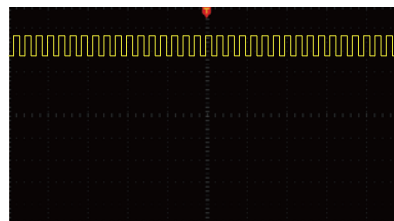


DC+AC
Vdc=50V, square ripple Vac=5V, frequency 1000Hz

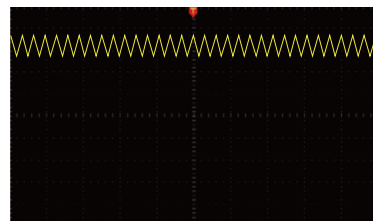


DC+AC
Vdc=50V, triangle ripple Vac=5V, frequency 1000Hz

Built-in Rich Waveform Library


The IT-EC7800 series includes 30 built-in harmonic distortion waveforms. The series also includes a variety of built-in waveforms such as triangle wave, sine wave, square wave, and sawtooth wave, which can be selected and displayed via the menu on the LCD screen.

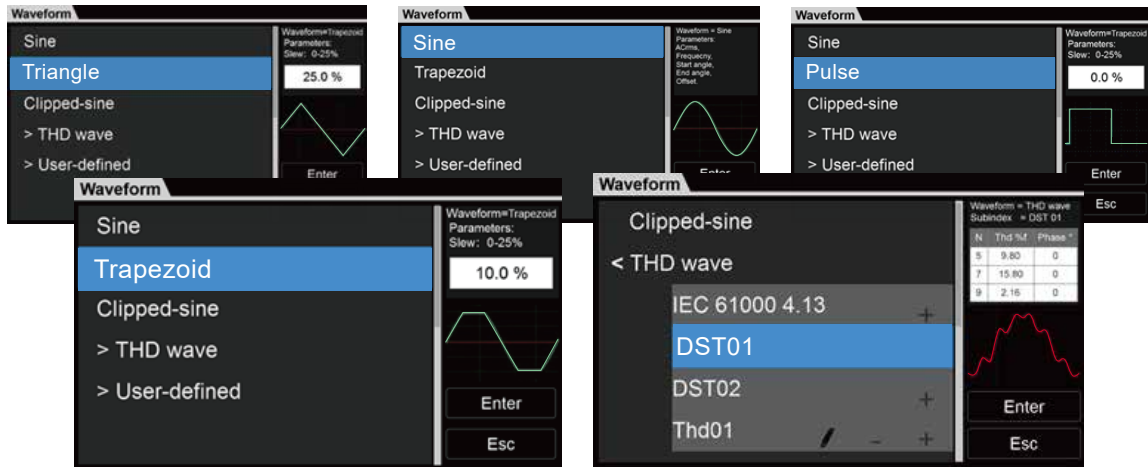

Users can also customize and edit waveforms through the interface, to replicate and simulate real-world power waveforms from actual fault events.

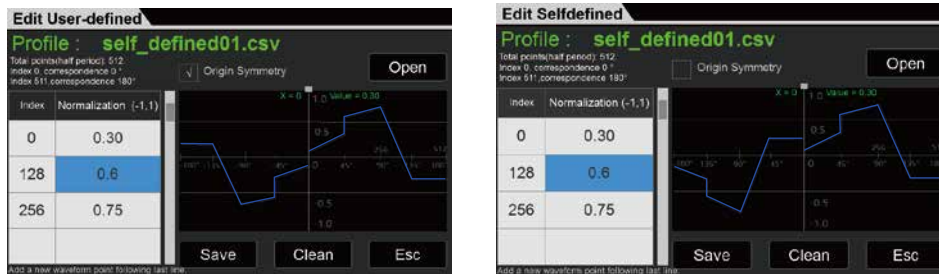

The IT-EC7800 series has 30 built-in harmonic distortion waveforms.

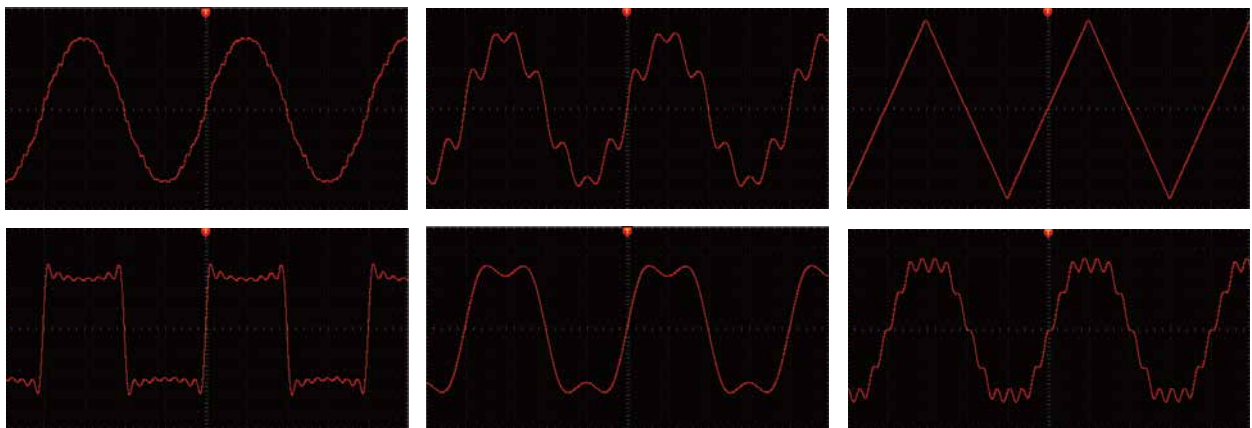

IT-EC7802-350-10U				
Input parameter				
AC input	Wiring connection	3 phase 3wire + ground(PE)		
	Line voltage	RMS	(200~220) ±10% V / (380~480) ±10% V	
	Line current	RMS	<8.1A	
	Apparent Power	<2.4kVA		
	Frequency range	45~65Hz		
	PF	typ	0.98	
Output parameter				
AC output	Output voltage	VLN	0~350V	
	Output current	RMS (1phase)	10A	
		Crest Factor *1	6	
		Peak (1phase)	40A	
Output power	Max. Power (1phase)	2kVA		
Voltage setting				
AC output	Range	0~350V (1phase)		
	Resolution	0.01V		
	Accuracy	<0.1%+0.1% F.S. (16Hz~500Hz) / <0.1%+(0.2%*kHz)F.S(500.01Hz~1kHz)		
	Current setting			
AC output	Range	RMS	10A (1phase)	
	Resolution	0.01A		
	Accuracy	<0.1% + 0.2% F.S.(16Hz~150Hz) / <0.2% + 0.3% F.S.(150.01Hz~500Hz) / <0.3%+(0.6%*kHz) F.S(500.01Hz~1kHz)		
Frequency setting				
AC output	Range	16~500Hz (Low*2) / 16~1kHz (High*2)		
	Resolution	0.01Hz		
	Accuracy	0.01% (16Hz~500Hz) / 0.1% (500.01Hz~1kHz)		
	harmonic waveform	50/60Hz	up to 50 orders	
	Phase setting			
AC output	Range	0~360°		
	Resolution	0.01°		
DC output				
DC output	Voltage setting	Range	-499~499Vdc (1phase)	
		Resolution	0.01V	
		Accuracy	<0.1%+0.1% F.S.	
	Current setting	Range	-10~10Adc (1phase)	
		Resolution	0.01A	
		Accuracy	<0.1% + 0.2% F.S.	
DC output	Power(max.)	Total Power	Max. Power (1phase) 2kW	
		Line regulation	<0.05% F.S.	
Voltage stability	Load regulation*3	<0.05% + 0.05% F.S. (DC,16Hz~500Hz) / <0.05% + (0.1%*kHz) F.S(500.01Hz~1kHz)		
	THD*4	<0.5%(16Hz~100Hz) / <1%(100Hz~500Hz) / <1%+(1%*kHz) (500.01Hz~1kHz)		
	Voltage ripple	RMS	<0.4V	
	Dynamic response*5	typ	220us	
Measurement parameter				
Voltage RMS	Accuracy	<0.1%+0.1% F.S. (DC,16Hz~500Hz) / <0.1%+(0.2%*kHz) F.S(500.01Hz~1kHz)		
Current RMS	Accuracy	<0.1% + 0.2% F.S.(DC,16Hz~150Hz)/<0.2% + 0.3% F.S.(150.01Hz~500Hz)/<0.3% + (0.6%*kHz) F.S(500.01Hz~1kHz)		
Peak current	Accuracy	<0.4% + 0.6% F.S.(16Hz~500Hz) / <0.4% + (1.2%*kHz) F.S(500.01Hz~1kHz)		
Output power	Accuracy	<0.4% +0.4% F.S. (DC,16Hz~500Hz) / <0.4% +<(0.8%*kHz) F.S(500.01Hz~1kHz)		
Harmonic measurement	Max.	50/60Hz	up to 50 orders	
Efficiency	typ	84%		
Weight		15kg		

*1 When the output frequency is 50Hz/60Hz and the peak current is not exceeded, the maximum Crest Factor (CF) is 6; under full current and full power conditions, the CF is up to 4.

*2 When LoopSpeed is set to Low, the system has better load adaptability; when set to High, it provides faster dynamic response.

*3 For parallel models, Sense remote measurement mode must be used during testing.

*4 Test conditions: Pure resistive load under full power output.

*5 Dynamic response time test conditions: DC mode, High speed setting, DUT capacitance < 10µF.

* Specifications are subject to change without prior notice.

IT-EC7804-350-20U				
Input parameter				
AC input	Wiring connection	3 phase 3wire + ground(PE)		
	Line voltage	RMS	(200~220) ±10% V *1 / (380~480) ±10% V	
	Line current	RMS	<9.4A	
	Apparent Power	<4.6kVA		
	Frequency range	45~65Hz		
	PF	typ	0.98	
Output parameter				
AC output	Output voltage	VLN	0~350V	
	Output current	RMS (1phase)	20A	
		Crest Factor *2	6	
		Peak (1phase)	80A	
Output power	Max. Power (1phase)	4kVA		
Voltage setting				
AC output	Range	0~350V (1phase)		
	Resolution	0.01V		
	Accuracy	<0.1%+0.1% F.S. (16Hz~500Hz) / <0.1%+(0.2%*kHz) F.S.(500.01Hz~1kHz)		
	Current setting			
AC output	Range	RMS	20A (1phase)	
	Resolution	0.01A		
	Accuracy	<0.1% + 0.2% F.S.(16Hz~150Hz) / <0.2% + 0.3% F.S.(150.01Hz~500Hz) / <0.3%+(0.6%*kHz) F.S(500.01Hz~1kHz)		
Frequency setting				
AC output	Range	16~500Hz (Low*3) / 16~1kHz (High*3)		
	Resolution	0.01Hz		
	Accuracy	0.01% (16Hz~500Hz) / 0.1% (500.01Hz~1kHz)		
	harmonic waveform	50/60Hz	up to 50 orders	
	Phase setting			
AC output	Range	0~360°		
	Resolution	0.01°		
Voltage setting				
DC output	Range	-499~499Vdc (1phase)		
	Resolution	0.01V		
	Accuracy	<0.1%+0.1% F.S.		
	Current setting			
	DC output	Range	-20~20Adc (1phase)	
		Resolution	0.01A	
Accuracy		<0.1% + 0.2% F.S.		
Power(max.)				
Voltage stability	Total Power	Max. Power (1phase)	4kW	
	Line regulation	<0.05% F.S.		
	Load regulation*4	<0.05% + 0.05% F.S. (DC,16Hz~500Hz) / <0.05% + (0.1%*kHz) F.S(500.01Hz~1kHz)		
	THD*5	<0.5%(16Hz~100Hz) / <1%(100Hz~500Hz) / <1%+(1%*kHz) (500.01Hz~1kHz)		
	Voltage ripple	RMS	<0.4V	
Dynamic response*6	typ	220us		
Measurement parameter				
Voltage RMS	Accuracy	<0.1%+0.1% F.S. (DC,16Hz~500Hz) / <0.1%+(0.2%*kHz) F.S(500.01Hz~1kHz)		
Current RMS	Accuracy	<0.1% + 0.2% F.S.(DC,16Hz~150Hz)/<0.2% + 0.3% F.S.(150.01Hz~500Hz)/<0.3% + (0.6%*kHz) F.S(500.01Hz~1kHz)		
Peak current	Accuracy	<0.4% + 0.6% F.S.(16Hz~500Hz) / <0.4% + (1.2%*kHz) F.S(500.01Hz~1kHz)		
Output power	Accuracy	<0.4% +0.4% F.S. (DC,16Hz~500Hz) / <0.4% + <(0.8%*kHz) F.S(500.01Hz~1kHz)		
Harmonic measurement	Max.	50/60Hz	up to 50 orders	
Efficiency	typ	88%		
Weight	16.5kg			

*1 When the input voltage is (200~220)V ±10%, the output rated power is limited to 3kW.

*2 When the output frequency is 50Hz/60Hz and peak current is not exceeded, the maximum Crest Factor (CF) is 6; under full current and full power conditions, the CF is up to 4.

*3 When LoopSpeed is set to Low, the system has better load adaptability, when set to High, it provides faster dynamic response.

*4 For parallel models, Sense remote measurement mode must be used during testing.

*5 Test conditions: Pure resistive load under full power output.

*6 Dynamic response time test conditions: DC mode, High speed setting, DUT capacitance < 10μF.

* Specifications are subject to change without prior notice.

IT-EC7806-350-30			
Input parameter			
AC input	Wiring connection	3 phase 3wire + ground(PE)	
	Line voltage	RMS (200~220) ±10% V *1 / (380~480) ±10% V	
	Line current	RMS <13.8A	
	Apparent Power	<7kVA	
	Frequency range	45~65Hz	
	PF	typ 0.98	
Output parameter			
AC output	Output voltage	VLN	0~350V
		VLL (3phase)	0~606V
	Output current	RMS (1phase)	30A
		Crest Factor *2	6
		Peak (1phase)	120A
		RMS(3phase)	10A
		Peak(3phase)	40A
Output power	Per Phase	2kVA	
	Max. Power (1phase/3phase)	6kVA	
Voltage setting			
AC output	Range	0~350V (1phase/3phase)	
	Resolution	0.01V	
	Accuracy	<0.1%+0.1% F.S. (16Hz~500Hz) / <0.1%+(0.2%*kHz)F.S(500.01Hz~1kHz)	
	Current setting		
AC output	Range	RMS 30A (1phase)/10A (3phase)	
	Resolution	0.01A	
	Accuracy	<0.1% + 0.2% F.S.(16Hz~150Hz) / <0.2% + 0.3% F.S.(150.01Hz~500Hz) / <0.3%+(0.6%*kHz) F.S(500.01Hz~1kHz)	
Frequency setting			
AC output	Range	16~500Hz (Low*3) / 16~1kHz (High*3)	
	Resolution	0.01Hz	
	Accuracy	0.01% (16Hz~500Hz) / 0.1% (500.01Hz~1kHz)	
	harmonic waveform	50/60Hz up to 50 orders	
	Phase setting		
AC output	Range	0~360°	
	Resolution	0.01°	
Voltage setting			
DC output	Range	-499~499Vdc (1phase)	
	Resolution	0.01V	
	Accuracy	<0.1%+0.1% F.S.	
	Current setting		
	Range	-30~30A dc (1phase)	
	Resolution	0.01A	
Accuracy	<0.1% + 0.2% F.S.		
Power(max.)			
DC output	Total Power	Max. Power (1phase) 6kW	
	Voltage stability		
Voltage stability	Line regulation	<0.05% F.S.	
	Load regulation *4	<0.05% + 0.05% F.S. (DC,16Hz~500Hz) / <0.05% + (0.1%*kHz) F.S(500.01Hz~1kHz)	
	THD *5	<0.5%(16Hz~100Hz) / <1%(100.01Hz~500Hz) / <1%+(1%*kHz) (500.01Hz~1kHz)	
	Voltage ripple	RMS <0.4V	
	Dynamic response *6	typ 200us	
Measurement parameter			
Voltage RMS	Accuracy	<0.1%+0.1% F.S. (DC,16Hz~500Hz) / <0.1%+(0.2%*kHz) F.S(500.01Hz~1kHz)	
Current RMS	Accuracy	<0.1% + 0.2% F.S.(DC,16Hz~150Hz)/<0.2% + 0.3% F.S.(150.01Hz~500Hz)/<0.3% + (0.6%*kHz) F.S(500.01Hz~1kHz)	
Peak current	Accuracy	<0.4% + 0.6% F.S.(16Hz~500Hz) / <0.4% + (1.2%*kHz) F.S(500.01Hz~1kHz)	
Output power	Accuracy	<0.4% + 0.4% F.S. (DC,16Hz~500Hz) / <0.4% + <(0.8%*kHz) F.S(500.01Hz~1kHz)	
Harmonic measurement	Max.	50/60Hz up to 50 orders	
Efficiency	typ	88%	
Weight		18kg	

*1 When the input voltage is (200~220)V ±10%, the output rated power is limited to 50%.

*2 When the output frequency is 50Hz/60Hz and the peak current is not exceeded, the maximum Crest Factor (CF) is 6; under full current and full power conditions, the CF is up to 4.

*3 When LoopSpeed is set to Low, the system has better load adaptability; when set to High, it provides faster dynamic response.

*4 For parallel operation, Sense remote measurement mode must be used during testing.

*5 Test conditions: Pure resistive load under full power output.

*6 Dynamic response time test condition: DC mode, High speed setting, DUT capacitance < 10μF.

* Specifications are subject to change without prior notice.

IT-EC7815-350-90			
Input parameter			
AC input	Wiring connection	3 phase 3wire + ground(PE)	
	Line voltage	RMS (200~220) ±10% V *1 / (380~480) ±10% V	
	Line current	RMS <34A	
	Apparent Power	<17.4kVA	
	Frequency range	45~65Hz	
	PF	typ 0.98	
Output parameter			
AC output	Output voltage	VLN 0~350V VLL (3phase) 0~606V	
	Output current	RMS (1phase) 90A	
		Crest Factor *2 6	
		Peak (1phase) 270A	
		RMS(3phase) 30A	
		Peak(3phase) 90A	
	Output power	Per Phase 5kVA Max. Power (1phase/3phase) 15kVA	
Voltage setting			
Range	0~350V (1phase/3phase)		
Resolution	0.01V		
Accuracy	<0.1%+0.1% F.S. (16Hz~500Hz) / <0.1%+(0.2%*kHz)F.S(500.01Hz~1kHz)		
Current setting			
Range	RMS 90A (1phase)/30A (3phase)		
Resolution	0.01A		
Accuracy	<0.1% + 0.2% F.S.(16Hz~150Hz) / <0.2% + 0.3% F.S.(150.01Hz~500Hz) / <0.3%+(0.6%*kHz) F.S(500.01Hz~1kHz)		
Frequency setting			
Range	16~500Hz (Low*3) / 16~1kHz (High*3)		
Resolution	0.01Hz		
Accuracy	0.01% (16Hz~500Hz) / 0.1% (500.01Hz~1kHz)		
harmonic waveform	50/60Hz	up to 50 orders	
Phase setting			
Range	0~360°		
Resolution	0.01°		
DC output	Voltage setting		
	Range	-499~499Vdc (1phase)	
	Resolution	0.01V	
	Accuracy	<0.1%+0.1% F.S.	
	Current setting		
	Range	-90~90A dc (1phase)	
	Resolution	0.01A	
	Accuracy	<0.1% + 0.2% F.S.	
	Power(max.)		
	Total Power	Max. Power (1phase)	15kW
Voltage stability	Line regulation	<0.05% F.S.	
	Load regulation*4	<0.05% + 0.05% F.S. (DC,16Hz~500Hz) / <0.05% + (0.1%*kHz) F.S(500.01Hz~1kHz)	
	THD*5	<0.5%(16Hz~100Hz) / <1%(100.01Hz~500Hz) / <1%+(1%*kHz) (500.01Hz~1kHz)	
	Voltage ripple	RMS	<0.4V
	Dynamic response*6	typ	200us
Measurement parameter			
Voltage RMS	Accuracy	<0.1%+0.1% F.S. (DC,16Hz~500Hz) / <0.1%+(0.2%*kHz) F.S(500.01Hz~1kHz)	
Current RMS	Accuracy		
Peak current	Accuracy	<0.4% + 0.6% F.S.(16Hz~500Hz) / <0.4% + (1.2%*kHz) F.S(500.01Hz~1kHz)	
Output power	Accuracy	<0.4% + 0.4% F.S. (DC,16Hz~500Hz) / <0.4% + <(0.8%*kHz) F.S(500.01Hz~1kHz)	
Harmonic measurement	Max.	50/60Hz	up to 50 orders
Efficiency	typ*7	91%	
Weight	42kg		

*1 When the input voltage is (200~220)V ±10%, models rated above 12kW are limited to 60% of their rated output power.

*2 When the output frequency is 50Hz/60Hz and peak current is not exceeded, the maximum Crest Factor (CF) is 6; under full current and full power conditions, the CF is up to 3.

*3 When LoopSpeed is set to Low, the system has better load adaptability; when set to High, it provides faster dynamic response.



*4 For parallel models, Sense remote measurement mode must be used during testing.

*5 Test conditions: Pure resistive load under full power output.

*6 Dynamic response time test conditions: DC mode, High speed setting, DUT capacitance < 10μF.

*7 Test conditions: Input 380VLL/50Hz, output 3-phase 350Vrms/50Hz at full power.

* Specifications are subject to change without prior notice.

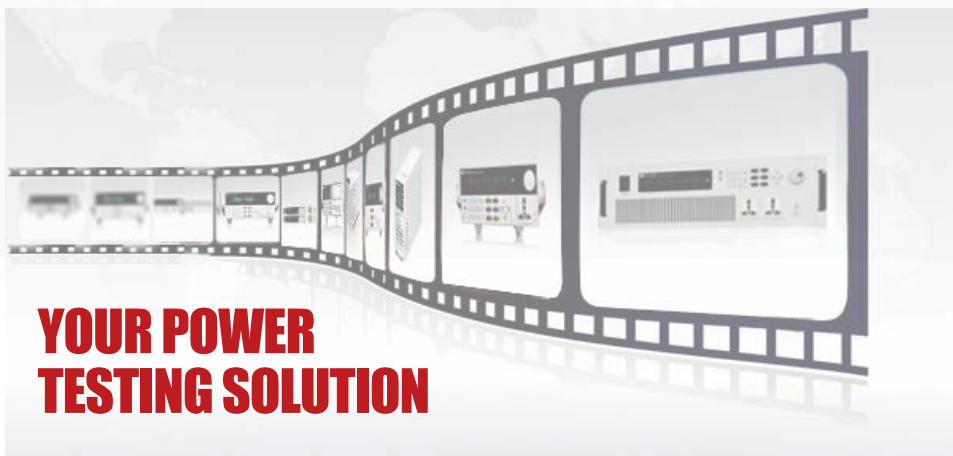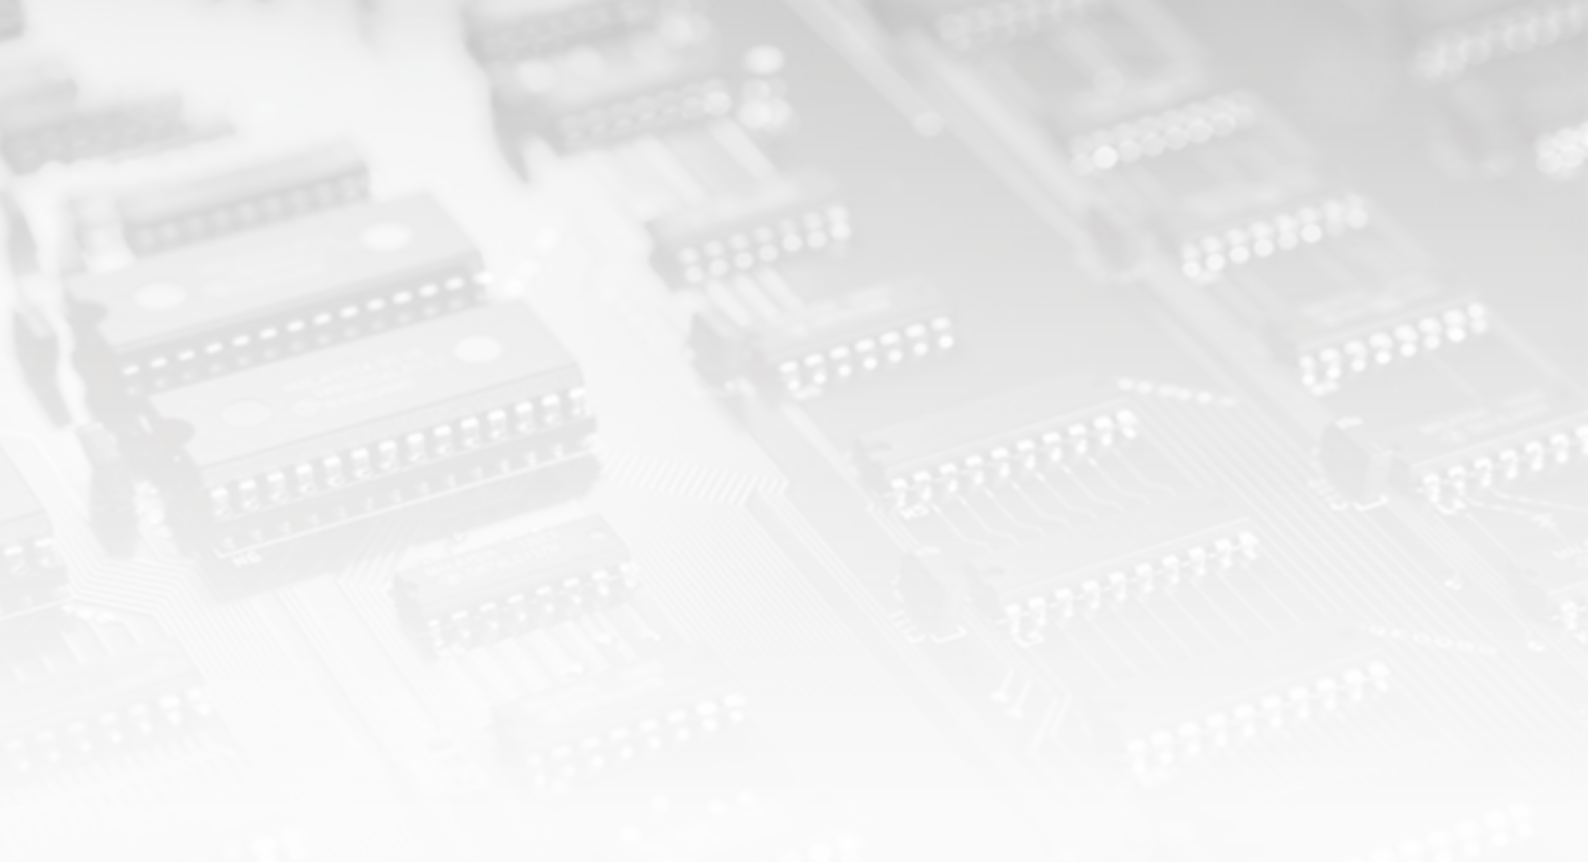

YOUR POWER TESTING SOLUTION

This information is subject to change without notice. For more information, please contact ITECH.

Your contact:



Schulz-Electronic GmbH
Dr.-Rudolf-Eberle-Straße 2
D-76534 Baden-Baden
Fon + 49.7223.9636.0

vertrieb@schulz-electronic.de
www.schulz-electronic.de