



PM150-series 120 to 150 W

Input / Output

- Wide input voltage ranges.
- Input ranges from 10 to 270 Vd.c.
- Single outputs from 12 to 48 Vd.c.
- Reverse input voltage protection.
- 2.5 kVa.c. isolation input/output, input/case, output/case.

Features

- Overvoltage protection OVP.
- Extra output with series diode.
- Over/Under voltage alarm relay.

Operation

- Operating temperature range -25 to +55 °C and +70 ° with derating.
- High efficiency.
- Fully encapsulated, meets IP20 as standard.
- Convection cooled.
- Output voltage adjustable on frontpanel.

EMC

- EN/IEC 61000-6-3, Emission.
- EN/IEC 61000-6-2, Immunity.
- EN/IEC 61000-4-4, 4 kV.
- EN/IEC 61000-4-5 level 2 & 3.

Input and outputs ratings

Nominal inputs	Input range	Code
12, 24 Vd.c.	10 - 30 V	A
24, 28, 36, 48 Vd.c.	20 - 60 V	B
72, 96, 110, 127 Vd.c.	50 - 150 V	C
110, 127, 220 Vd.c.	90 - 270 V	D

Input voltages meeting train standard EN 50155/IEC 60571, can be made on demand.

Output		
Voltage	Current	Power
12 V	10 - 12 A	120 - 150 W
13.8 V	8.7 - 10.9 A	120 - 150 W
15 V	8 - 10 A	120 - 150 W
24V	5 - 6.25 A	120 - 150 W
28 V	5.36 A	150 W
36 V	4.17 A	150 W
48 V	2.5 - 3.13 A	120 - 150 W

Output ratings and type code

Output			Input			
Voltage	Current	Power	10 - 30 V	20 - 60 V	50 - 150 V	90 - 270 V
12 V	10.0 A	120 W	PM150A12			
12 V	12.5 A	150 W		PM150B12	PM150C12	PM150D12
13.8 V	8.70 A	120 W	PM150A13.8			
13.8 V	10.9 A	150 W		PM150B13.8	PM150C13.8	PM150D13.8
15 V	8.00 A	120 W	PM150A15			
15 V	10.0 A	150 W		PM150B15	PM150C15	PM150D15
24 V	5.00 A	120 W	PM150A24			
24 V	6.25 A	150 W		PM150B24	PM150C24	PM150D24
28 V	5.36 A	150 W		PM150B28	PM150C28	PM150D28
36 V	4.17 A	150 W		PM150B36		
48 V	2.50 A	120 W	PM150A48			
48 V	3.13 A	150 W		PM150B48	PM150C48	PM150D48

How to read our product code:

Example **PM150B12**

PM150 = Family code

B = input voltage code B

12 = Output voltage 12V

Features

Overvoltage protection OVP

The output voltage is limited to 15 % over nominal output voltage by an extra regulation circuit.

Extra output with series diode

Use the series diode output when the output is connected in parallel with other power supplies to archive redundancy.

Over / Under voltage alarm

The built in relay changes to alarm state if the converter output voltage is not within 90 to 115 % of nominal output.

The user can select NO or NC relay function. The relay rating is 30 V 0.5 A (d.c. or a.c.)

Optional Features

Inrush current limit with NTC

Reduces the inrush current during start up. The input voltage range will be affected. Only available on C & D inputs.

Conformally coating

For environment with high non condensing humidity max 98 % RH.

+70 °C operating temperature

Contact factory for derating as it depends on model. The alarm can not be used at +70 °C.

Mounting brackets L214-1

See figure 3.

19" Rack mounting set PL88-2

To mount two PM150 together to form a full 19" rack unit, see figure 2.

19" Rack mounting bracket PL88-3

To mount one PM150 to form a full 19" rack unit, see figure 2.

EN/IEC 61000-4-5 level 4

External varistor + surge arrester mounted from pole to ground. With this filter the input meets level 4 of EN/IEC 61000-4-5 (+/-2 kV line to line, 4 kV line to ground)

DIN-rail clips

Clips to mount PM150 on a 35 mm DIN-rail. (Used with PL88-1 & L-214 see figure 3)

Train input

Input voltage range according to train standard EN 50155 and IEC 60571.

General data / input data

Design topology	Push-Pull
Switching frequency	30 kHz
Emission / Immunity	See page 4
Safety EN/IEC 60950	Class I
Max. accepted input ripple ¹ 50-400 Hz	2 % of nominal voltage
Input power at no load	Max. 9 W
Inrush current limit	No
Reverse input voltage protection	
A, B inpuete code	Parallel diode
C, D input code	Series diode
Dimensions (D x W x H)	160 x 214 x 88 mm
Weight	2.5 kg

Output data

Source regulation	0.1 %
Load regulation (0 to 100 % load)	0.3 %
Transient recovery time for 10 to 90 % load step to within 3 % of nominal output voltage.	<3 ms
Output ripple (60 kHz) ²	30 mV p-p
Input ripple attenuation to output (50 to 400 Hz)	150:1
Emission / Immunity	See page 4
Temperature coefficient	0.02 %/°C
Min output adjustment range adjustable with a 15 turn potentiometer	95 - 110 %
Current limit, rectangular.	105 %
Remote sense	No
Soft start	Yes
Start-up time	1 s
Hold-up time, contact factory	2 - 25 ms
Efficiency ³	80 - 88 %
Operating temperature range at 100 % load. (Convection cooling) with derating ⁴	-25 to +55 °C +70 °C
Storage temperature range	-40 to +85 °C

- Higher ripple affects the input, contact factory
- The output ripple might increase to 0.5 % RMS of V_{out} , when EN/IEC 61000-4-3, 10 V/m test is applied
- Lowest efficiency measured within the whole input voltage range at 100 % load.
- Contact factory for derating as it depends on model. The alarm relay can not be used at +70 °C.

Mechanical drawing

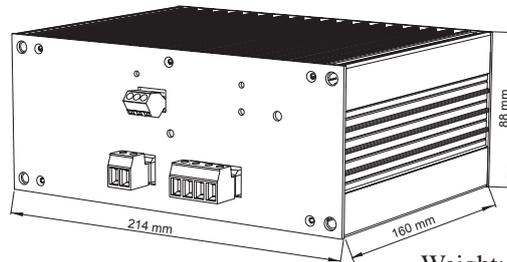


Figure 1. Dimensions

Weight: 2.5 kg

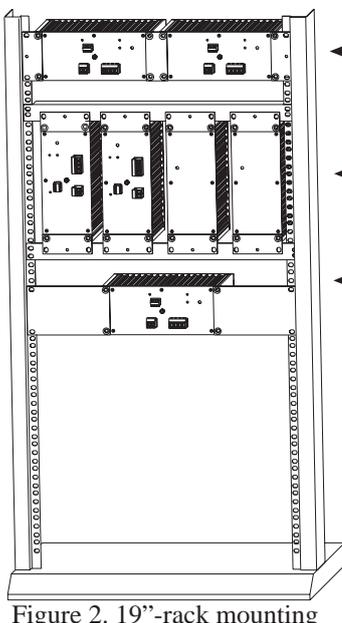


Figure 2. 19"-rack mounting

- ← 2 units PM150/240 mounted side by side forming one 19" unit using standard bracket PL88-1 and PL88-2 (Optional).
- ← 4 units PM150/240 mounted vertically using standard PL88-1 brackets and L480-2 (Optional).
- ← Single unit PM150/240 mounted as one 19" unit using PL88-3 brackets (Optional).

PM150/240 wall mounted.
Using mounting brackets
(Optional) L214-1

PM150/240 wall mounted.
Using standard brackets
PL88-1

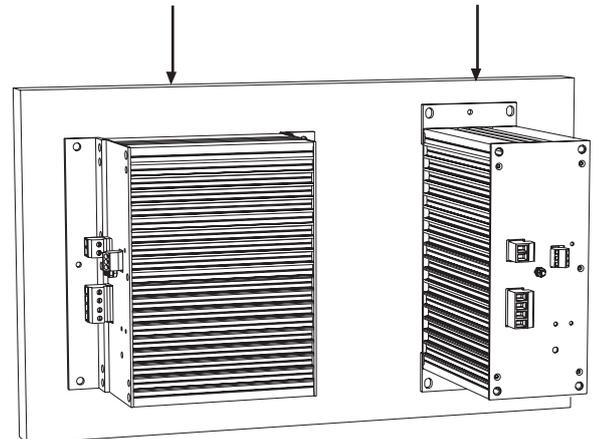


Figure 3. Wall and chassis mounting

PM150 meets the requirements defined by CE mark as apparatus.

PM150 meets requirements of EMC directive and low voltage directive (LVD).

Thus a PM150 can be used as free standing unit or in installations as well as systems designed according to "The modular approach". PM150 can be used in installation without further EMC tests, if our installation instructions are followed. Please note that product standards can demand different levels or other basic standard tests. We test according to levels below. For higher levels or other tests, contact factory.

Isolation testable levels	Test voltage
Input / Output	2.5 kVa.c. / 4 kVd.c.
Input / Case	2.5 kVa.c. / 4 kVd.c.
Output / Case all outputs	2.5 kVa.c. / 4 kVd.c.
Input / Alarm	2.5 kVa.c. / 4kVd.c.
Output / Alarm	2.5 kVa.c. / 4 kVd.c.
case / Alarm	2.5 kVa.c. / 4 kVd.c.

We use the product standard Low voltage power supplies, DC outputs EN/IEC 61204-3 and the generic EMC standards:
 EN/IEC 61000-6-2 (Immunity)
 EN/IEC 61000-6-3 (Emission)

EMC

EMC-standards	EMC-performance		
Emission standards	Input	Output	Remarks
EN 55011/EN 55022 (0.15-30 MHz)	Level B	Level B	
EN 55011/EN 55022 (30-1000 MHz)	Level B		Enclosure test
Immunity standards	EN/IEC 61000-6-2		
EN/IEC 61000-4-2	8 kV / 15 kV		Contact / air, Enclosure test
EN/IEC 61000-4-3	10 V/m AM-Modulated		Output ripple can increase to 0.5 % of Vout Enclosure test
EN/IEC 61000-4-4	4 kV	4 kV	
EN/IEC 61000-4-5, Input code A, B EN/IEC 61000-4-5, Input code C, D	0.5 kV / 1 kV 1 kV / 2 kV ¹	0.5 kV / 1 kV 0.5 kV / 1 kV	Line-line 2 Ω / Line-case 12 Ω
EN 50121-3-2/IEC 62236-3-2	1 kV / 2 kV	1 kV / 2 kV	Line-line 42 Ω / Line-case 42 Ω
EN/IEC 61000-4-6	10 V _{RMS}	10 V _{RMS}	AM-Modulated
EN/IEC 61000-4-8	Not sensitive		Enclosure test
EN/IEC 61000-4-10	Not sensitive		Enclosure test

1 Higher level 2 kV / 4 kV with external filters, contact factory.

Contact

For updates on this datasheet we refer to www.polyamp.com
 Specifications subject to change without notice.



Polyamp AB Box 229 597 25 Åtvidaberg Sweden
 Telephone: +46 120 854 00 Telefax: +46 120 854 05
<http://www.polyamp.com>
 E-mail: info@polyamp.se

Distributor



Schulz-Electronic GmbH
 Dr.-Rudolf-Eberle-Straße 2
 D-76534 Baden-Baden
 Fon +49.7223.9636.30
 Fax +49.7223.9636.90
vertrieb@schulz-electronic.de
www.schulz-electronic.de