


## LDP-CW 18-05

### Driver for High Power Laser Diodes

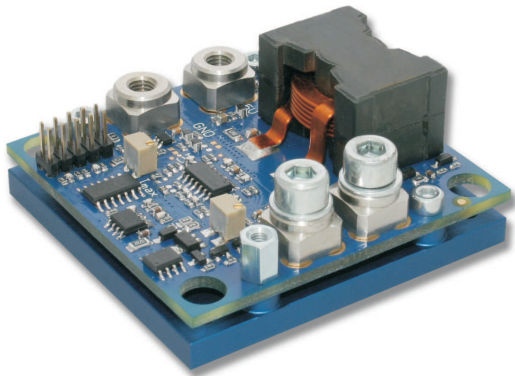

- Output current: 1 .. 18 A
- Compliance voltage: 1 .. 5 V
- Coverage of cw range
- Analog modulation up to 16 kHz
- Half-Brick size OEM-Module
- Several protective features
- High efficiency

#### Technical Data:\*

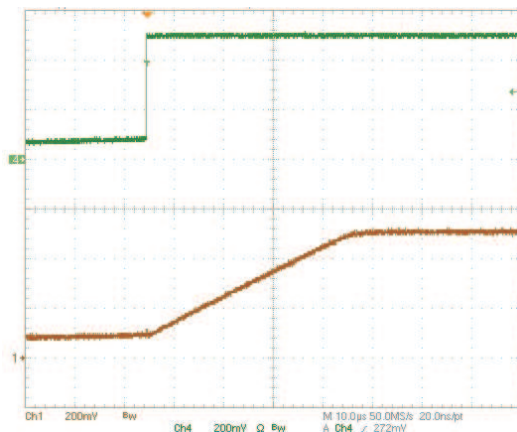


Figure: Current monitor output, scale: 10A/Div

Output current	1 .. 18 A
Max. compliance voltage	5 V
Current ripple	< 200 mA
Ripple frequency	> 400 kHz
Current overshoot	< 1 %
Analog modulation (5 A <sub>pp</sub> )	< 16 kHz
Current settling time (full-scale)	< 150 µs
Current setting input	0 .. 0.72 V external (25 A/V)
Current monitor	25 A/V
Voltage monitor	0.1 V/V
Supply voltage	4 .. 6 V DC (at least 1 V above compl. voltage)
Max. power dissipation	12 W
Dimensions in mm	60.9 x 57.8 x 54
Weight	Half-Brick size
Operating temperature	194 g
	0 to + 55 ° C

\* Specifications measured with a fast recovery diode instead of a laser diode. Technical data is subject to change without further notice.

#### Product Description:

The LDP-CW 18-05 OEM is a very affordable, compact and efficient current supply to drive e.g. the OSRAM Sirilas (registered trademark of OSRAM).

The capability ranges from continuous output current to analog modulated waveforms like sinusoidal, rectangular or triangular currents. The modulation is only limited by the di/dt of the coil. Its intended field of application is laser soldering and welding as well as generic surface treatment and show lasers.

The innovative current regulation concept of the LDP-CW 18-05 produces, compared to the commonly used linear regulation concept, considerably less losses. Hence only one supply voltage is needed for the control logic and the power stage. The current consumption drawn from the power supply only needs to cover the average laser power and is typically much less than 18 A.

Designed to shield your laser diode from damage, the LDP-CW 18-05 features a number of powerful protective safeguards:

- Innovative current regulation concept actively prevents laser diode from overshoots and over-current
- Integrated Soft Start
- Over-temperature shutdown
- Enable/Disable input
- Driver status output
- Shunt MOSFETs short the output clamps in case of an error
- Protection of the laser diode against reverse currents

#### Optional Accessories: LDP-C-BOB